

SUB ASSY-5

ALL ROUN ALONG STRAIGHT PLATES UNLESS OTHERWISE SPECIFIED. ROUNING INTO $\frac{3}{16}$ SPHERICAL RAD AT CORNERS

NOTE:-

(1) HEART TEST ALL 240 ALUM. ALLOY PARTS TO SPEC SECT COND.T.

(2) MAX RAGE DUE TO FALL ANYWAY OF BUSHES TO BE 1/8"

(3) TOP OF DESIGNED

(4) - TO BE MANUFACTURED TO FIT-S

(5) HANG UP WITH ATTACH WITH GUY IN PLACE



(6) LOCATE THIS SECRET-5 THAT GUY IS SPRING

GUY, TENDRE COUNTRY FROM THAT POSITION


SUBJECT HAS BEEN FORCED NORTHERN

STOP AT-GUY TRUCK

IN WASH DISTILLATION WITH 90 OIL AT-1 SERGE GUY AND

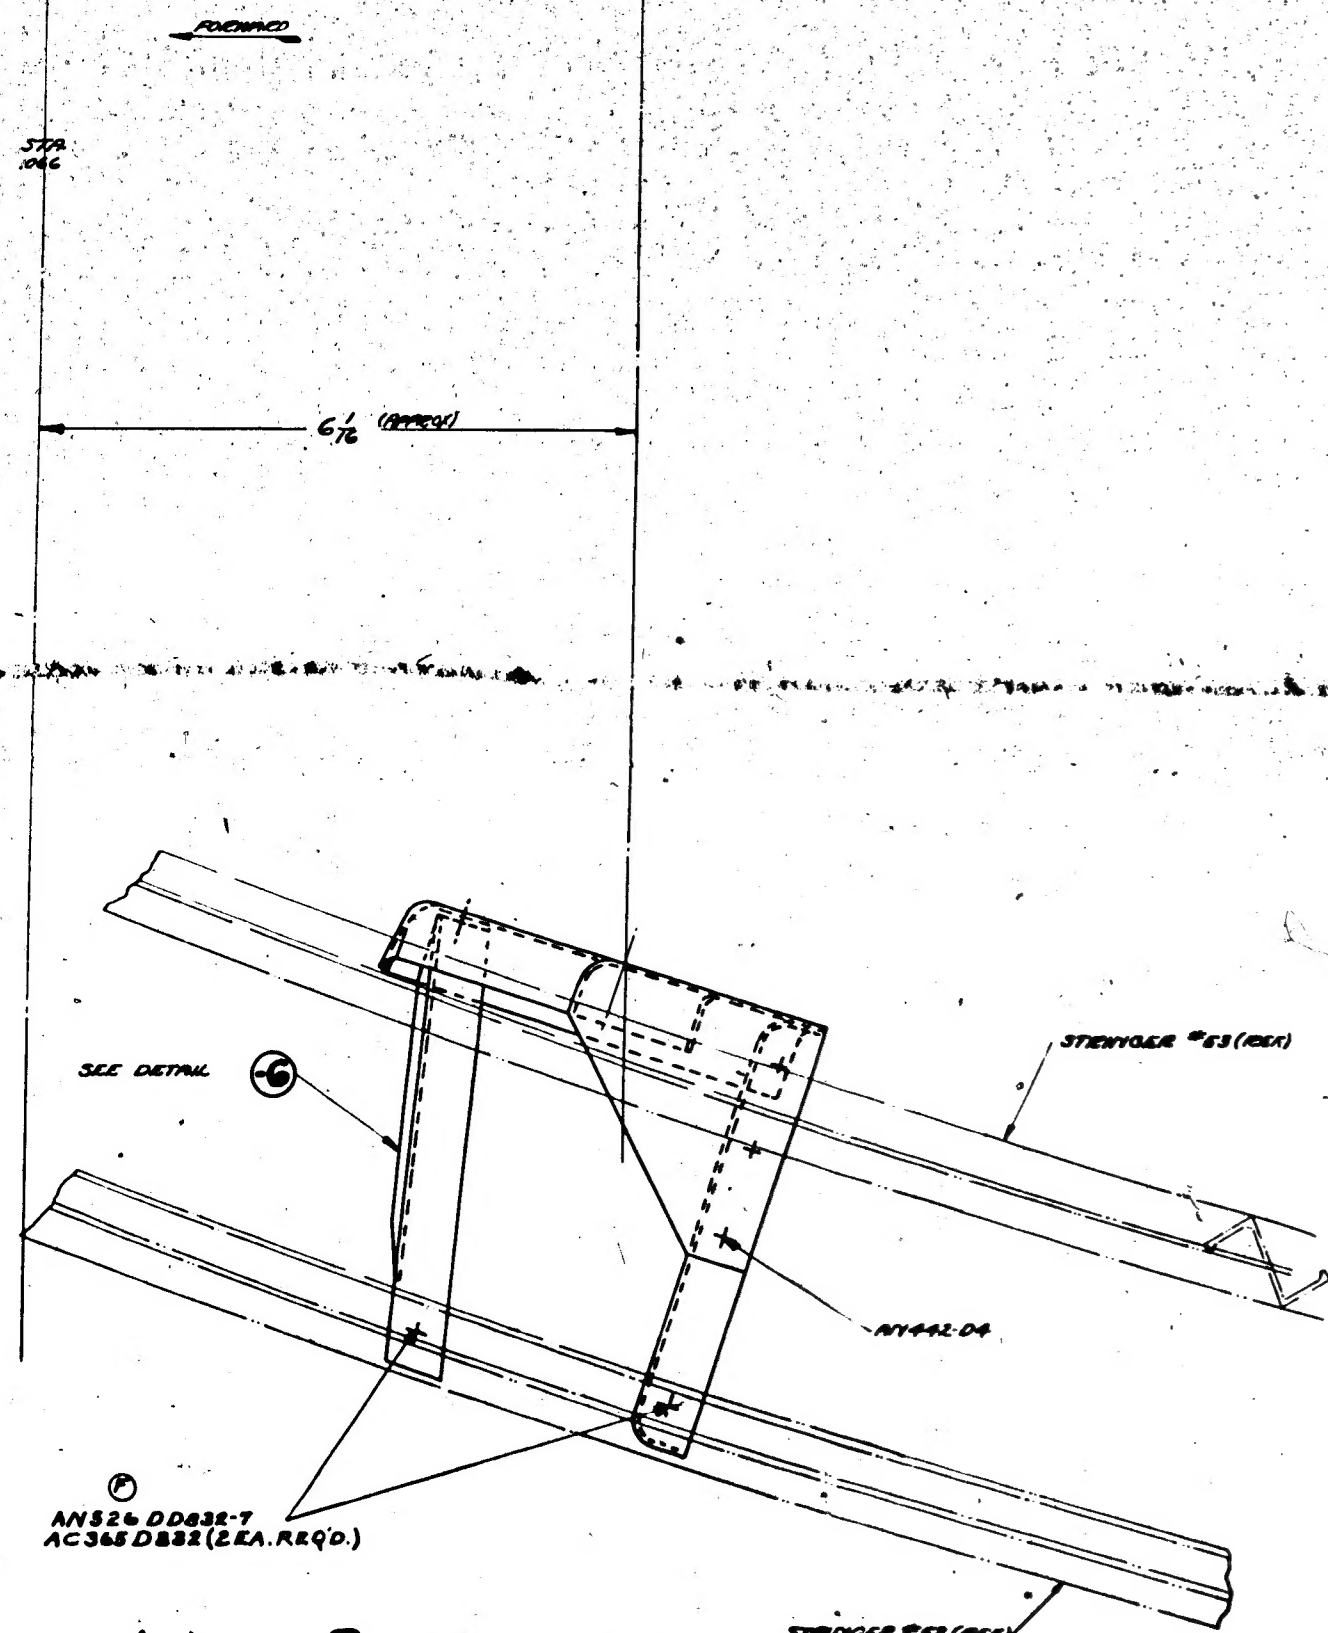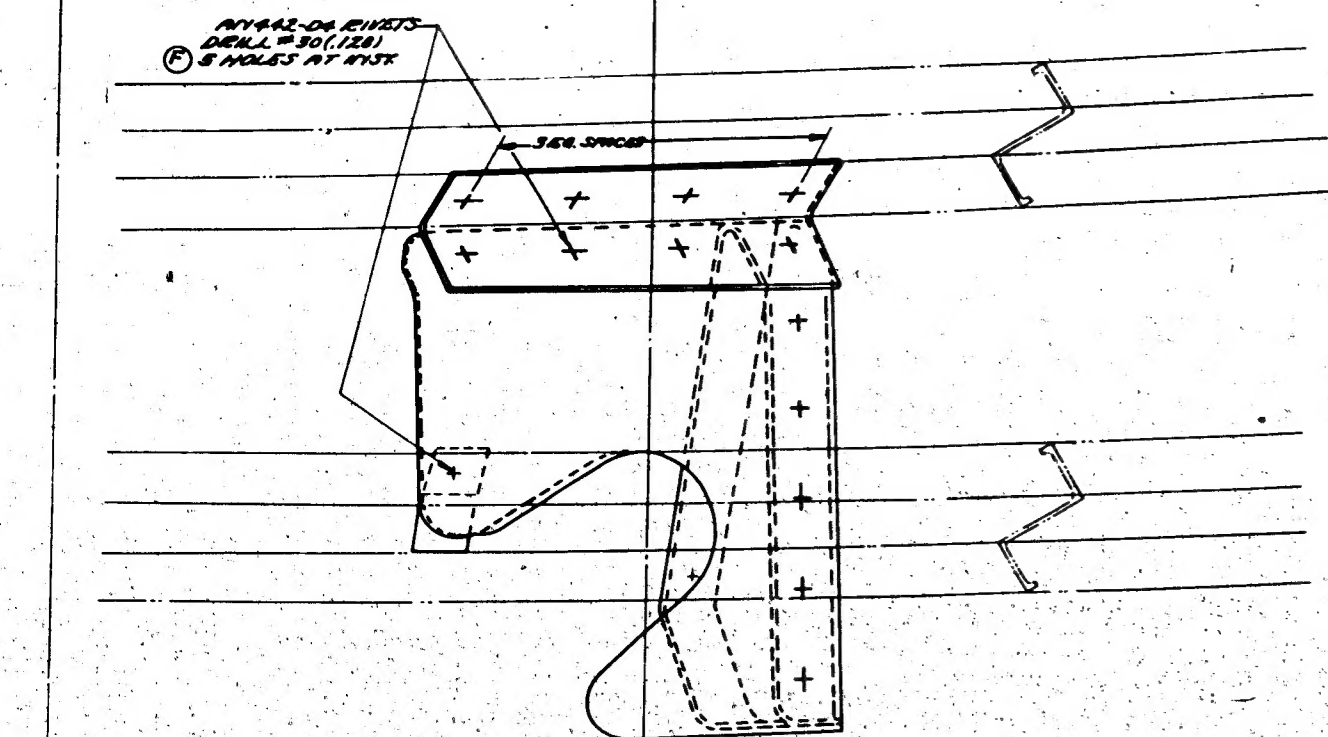

**SIDE VIEW OF INST.
LOOKING TO STD.**

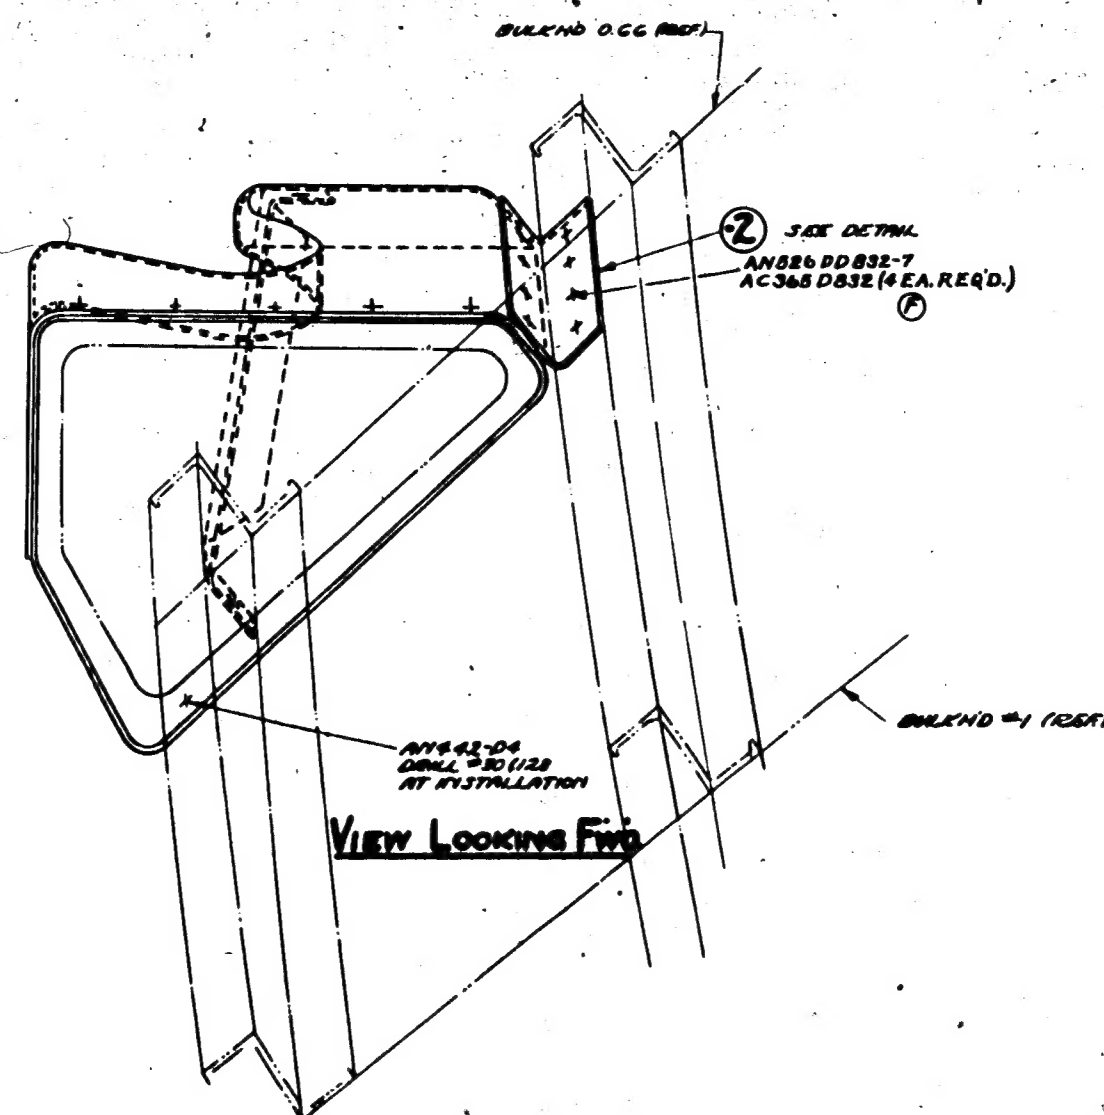

VIEW LOOKING FIVE

H 303

[illegible]